
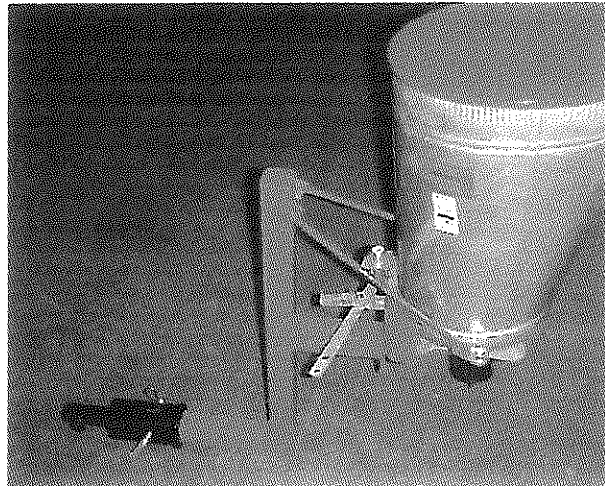


## 661 RECEIVER HITCH AND ADAPTER INSTRUCTIONS

1. See photo to connect mount to seeder correctly
2. Connect seeder to mount with the two 1/2" X 1" bolts furnished with seeder. Do not tighten or rest of assembly will be hard to do.
3. Connect the two brace rods to the top of the ears of the casting with 5/16" X 1" hex head bolts with nuts. Do not tighten.
4. It will be necessary to bend the clips on the brace rods when you raise the brace rod to align it with the 1/2" X 3" bolt on the top of mount. Put the bolt through both brace rods and tighten. Again, it might be necessary to bend the clips on the brace rods to align with the bolt.
5. **WARNING!!!** It might be necessary to run a separate ground due to a poor connection through the hitch. If the motor does not run, connect a ground wire. Also, the lid can come off due to wind turbulence if you drive too fast with seeder mounted.

When using this #661 2" receiver hitch with the GT-77 on ATV's, you must do the following:

1. Our part #668 receiver adaptor tube from 1-1/4" to 2" must be used, or similar part you can purchase.
2. When seeder is mounted on hitch and hitch is on the machine, do the following which is **VERY IMPORTANT !**
3. A strap must be run from the corner of the rack, around the 2" tube, just under where the brace rods are mounted, then to the other corner of the rack. This should then be snugged up so there is no bounce. You can buy these straps for the same price as we can. **PLEASE GET YOUR OWN!**

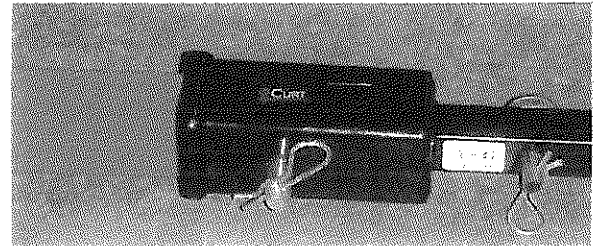

Kasco Mfg. Co., Inc.  
170 W 600 N  
Shelbyville IN 46176  
800.458.9129  
www.kascomfg.com