


Worksaver.


**Designed.
Engineered.
Remarkable
Value.**



Worksaver®

Model CS-394, CS-694, CS-1094, CSP-1094 Spreaders

**Available in three, six or ten bushel capacity
to meet all your spreading requirements.
Cone shaped hopper provides easy material
flow, making any seeding job easier.**

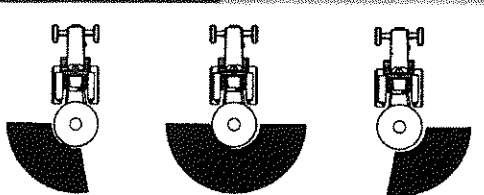

Choice of (3) Spread Patterns

Model CS-394 Shown

Worksaver

Models CS-394, CS-694, CS-1094, CSP-1094

MODEL CS-394 SPECIFICATIONS

Capacity	Three (3) bu. (250 lb.)
Hopper construction	Steel
Main frame construction	Tubular Steel
O.D. size of steel tubing (in/mm)	2-3/8 / (60mm)
Drive system	Tractor PTO
PTO driveline	Metric Series I
PTO speed	540 rpm
Fully shield drive	Standard
Spreader drive	PTO / Gear Box
Spreader patterns	Left, Center, Right
Hitch requirement	Cat. I (7/8" Dia. Lift pins)
Shipping weight (lb./kg)	105 / (47kg)
Product Computer Number	420775

MODEL CS-694 SPECIFICATIONS

Capacity	Six (6) bu. (500 lb.)
Hopper construction	Steel
Main frame construction	Tubular Steel
O.D. size of steel tubing (in/mm)	2-3/8 / (60mm)
Drive system	Tractor PTO
PTO driveline	Metric Series I
PTO speed	540 rpm
Fully shield drive	Standard
Spreader drive	PTO / Gear Box
Spreader patterns	Left, Center, Right
Hitch requirement	Cat. I (7/8" Dia. Lift pins)
Shipping weight (lb./kg)	110 / (50 kg)
Product Computer Number	420700

MODEL CS-1094 / CSP-1094 SPECIFICATIONS

Capacity	Ten (10) bu. (800 lb.)
Hopper construction	Steel (CS-1094) Poly (CSP-1094)
Main frame construction	Tubular Steel
O.D. size of steel tubing (in/mm)	2-3/8 / (60mm)
Drive system	Tractor PTO
PTO driveline	Metric Series I
PTO speed	540 rpm
Fully shield drive	Standard
Spreader drive	PTO / Gear Box
Spreader patterns	Left, Center, Right
Hitch requirement	Cat. I (7/8" Dia. Lift pins)
Shipping weight (lb./kg) (Steel Hopper).....	122 / (55 kg)
(Poly Hopper).....	112 / (51 kg)
Product Computer Number	420800 (CS-1094)

- Choice of (3) spread patterns.
- Choice of (3) sizes to fit your application.
- Adjustable spinner fins.
- Accurate broadcasting of grass seed, wheat or fertilizer.
- PTO operated for optimum performance.
- Fits Category I three-point hitches.
- Tubular steel main frame.
- Optional rotating wheel agitator for lime.
- Symmetric spreading for optimum overlap.
- Cone shaped hopper provides easy material flow.

▲ READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE OPERATION.

Worksaver Inc. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. Worksaver Inc. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.



Worksaver, Inc.

P.O. Box 100, Litchfield, IL 62056-0100

Phone: 217-324-5973 • Fax: 217-324-3356

E-mail: sales@worksaver.com

Web: www.worksaver.com

WS-SS007-LS (11/02)

Information Provided By:

